

Light Weight Lifters


Light Weight Lifter Electric 80-150 kg

Very flexible and easy-to-operate. Designed to relieve back, neck and shoulders from all types of lifting work from floor level up to head level. Lift/lowering system with electrical motor, chain drive, electronic regulation of lift/lowering incl. soft start/stop, electric overload protection, portable and adjustable hand control unit, maintenance free/sealed battery, automatic built-in battery charger, hand control cable and charger cable. Standard support legs are 105 mm high. Platform is made of polypropylene (PP).



Also available with low profile legs (85 mm)


E150

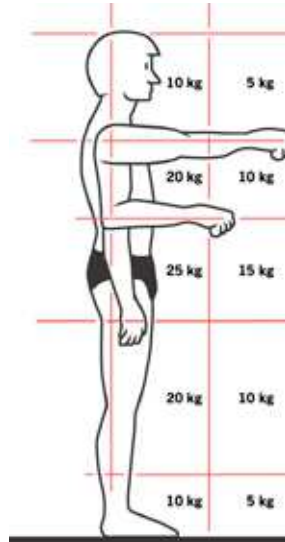

There are demands from the Work Environment Authorities and the EC-directives when it comes to rules for lifting. Also very light lifting or wrong working positions can expose body for injuries.



Art. no E-SS
Diameter = Ø 47 mm
Length = 600 mm.





Art. no E-DS
Diameter = Ø 47 mm
Length = 450 mm
CC distance = 200 mm



Art. no E-RR
Roll inner Ø 74-80 mm
Roll outer Ø 500 mm
Roll length 250 mm



Art. no E-VB
Size = 400x400 mm
Height 80 mm

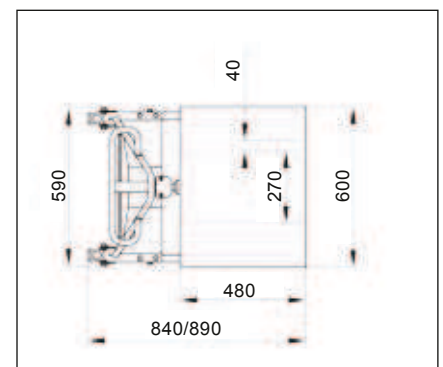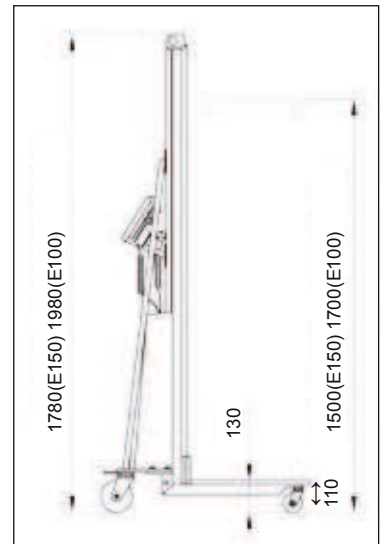

| Info | | | |
|------------------------------|--------------|--------------|--------------|
| Art.no | E80 | E100 | E150 |
| Version | Electric | Electric | Electric |
| Capacity (kg) | 80 | 100 | 150 |
| Load center (mm) | 235 | 235 | 235 |
| Lifting height, min-max (mm) | 130-1500 | 130-1700 | 130-1500 |
| Lifting speed (mm/s) | 50 | 50 | 50 |
| Platform (LxWxT) (mm) | 480x600x15 | 480x600x15 | 480x600x15 |
| Fork dimensions (LxWxT) (mm) | 400x330x40 | 400x330x40 | 400x330x40 |
| Battery (Ah/V) | 12/24 | 12/24 | 12/24 |
| Steer / Load wheels (mm) | Ø125/Ø75 | Ø125/Ø75 | Ø125/Ø75 |
| Dimensions (LxWxH) (mm) | 890x600x1780 | 890x600x1980 | 890x600x1780 |
| Weight (kg) | 60 | 62 | 60 |
| Price | | | |