# AGILA

## 2470PJP150P30-13

EAN 4031582338997

Swivel castor, housing made of pressed steel, bright zinc plated, blue passivated, double ball bearing swivel head, wheel axle with nut, bolt hole. Wheel centre made of Polypropylene, Tread: TENTEprene (thermoplastic rubber), grey non-marking, precision ball bearing , with threadguards Castors can be mounted with standard screws; various length screws can be used.



Picture may differ from original product

### Technical Data

| | |
|---|---|
| Wheel diameter | 150 mm |
| Wheel width | 32 mm |
| Centre hole | 13 mm |
| Offset | 45 mm |
| Swivel Interference | 240 mm |
| Overall height | 185 mm |
| Temperature | - 20 / + 60 °C |
| Standard | EN 12530 |
| Weight | 0.837 kg |
| Swivel Radius | 120 mm |
| Hardness of tread | Shore A 87 |
| Load capacity | 100 kg |
| Load capacity (static) | 200 kg |

### Structure & Mounting

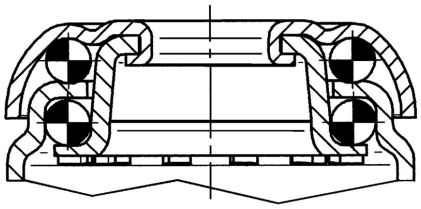

### Advantages at a glance

| | |
|---|---|
| Roll performance | ●●●○○ |
| Movement noise | ●●●○○ |
| Attrition | ●●●○○ |
| Corrosion resistance | ●●●○○ |

© Copyright 2024 TENTE International **www.tente.com** 03/01/2024